



# Hollygrove, Leonidas Group Pre-Construction Overview

---

City of New Orleans

March 26, 2020



# Agenda

---

- Introductions and House Rules
- Project Overview - PowerPoint Presentation
- Q&A



# Capital Improvement Program Highlights

---

- **More than \$2.2B worth of combined DPW / SWBNO work**
  - Most comprehensive infrastructure program our region has seen in a generation.
  - More than **200** individual projects - every neighborhood will feel a positive impact.
  - **Multiple Funding Sources:** FEMA-funded road / waterline work, FEMA-funded Hazard Mitigation Grant Program (HMGP) projects, HUD-funded National Disaster Resiliency Competition (NDRC) grant projects, SWB-funded Sewer System Evaluation and Rehabilitation Program (SSERP) (sewer consent decree) work and City-funded bond project work.
  - Work will create **thousands** of construction jobs across the city and maximize economic opportunity for the City's small and disadvantaged businesses.

# Types of CIP Construction – What the Colors Represent

---

## Full Reconstruction

- Repair sewage, water, and drainage lines, rebuild the street entirely, and repair sidewalks and curbs.

## Patch Mill/Overlay

- Repave the asphalt roadway from curb to curb and repair damaged sidewalks.

## Patch Concrete

- Remove damaged portions of the concrete roadway and replace it with new smooth concrete pavement and repair damaged sidewalks.

## Incidental Road Repairs

- Remove damaged portions of the asphalt roadway and replace it with new smooth pavement.

## Non-Paving Incidentals


- Repair damaged sidewalks, driveway aprons and curbs within the public right-of-way.

## Other Group Project

- Street is in the design phase or is planned to be built in a future project.



# Hollygrove, Leonidas Group A

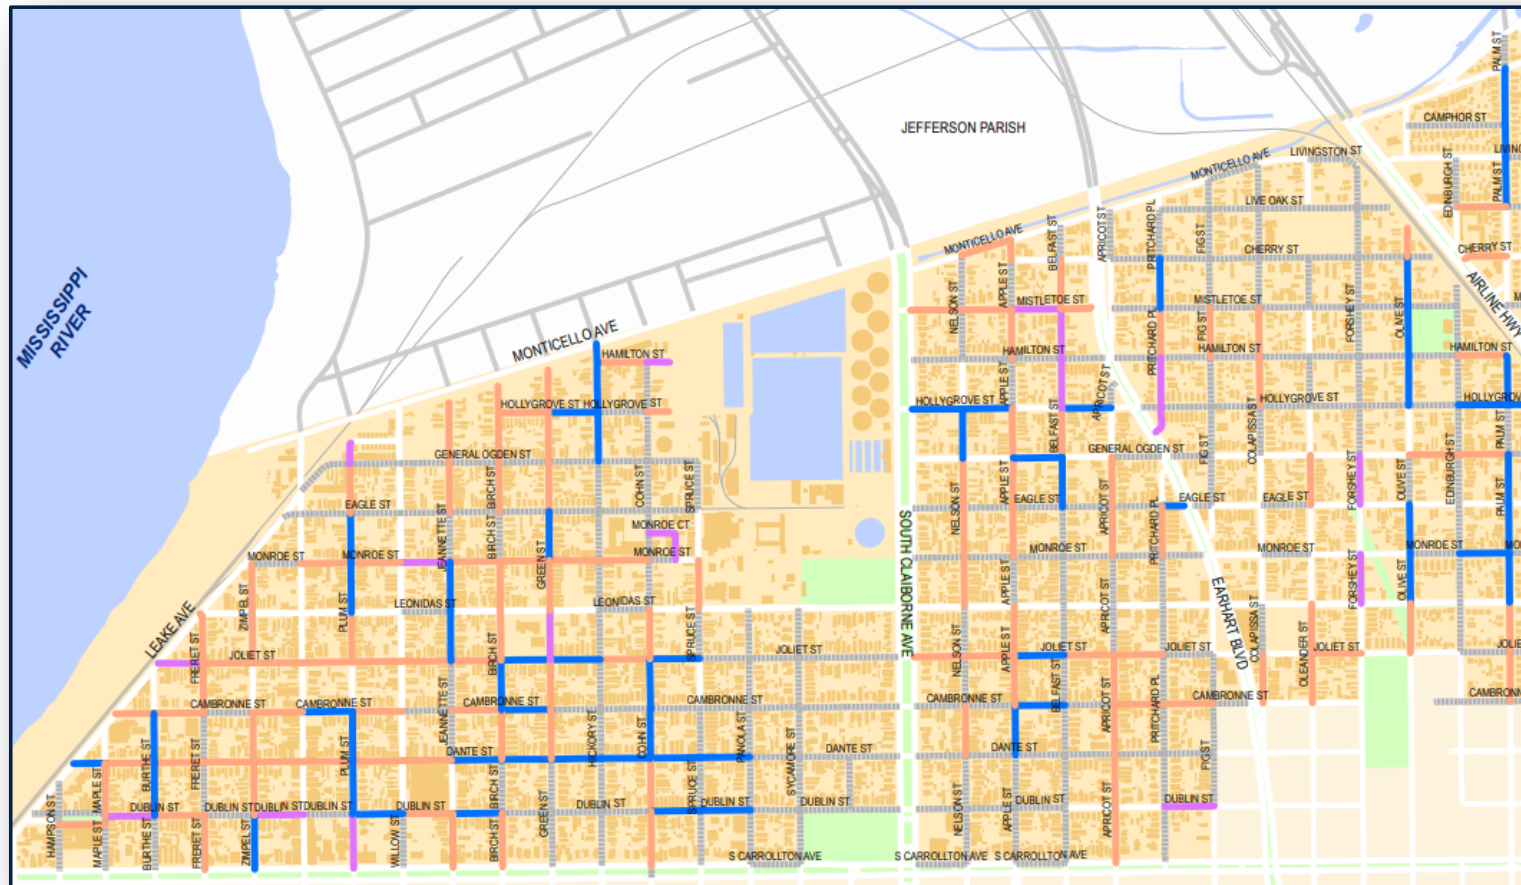

# Project Overview:

---

- **Design:** Waggoner Engineering Inc.
- **Construction:** Wallace C. Drennan Inc.
- **Construction Cost:** Approximately \$15.1 million
- **Timeline:** Project is scheduled to begin the first week of April 2020 and will be completed in spring 2021, weather permitting
- **Sequencing:** Sewer repairs will begin at Dublin and Hampson Streets, then north along Dublin to Panola; a second crew will begin repairs at Joliet and Burthe Streets, then north along Joliet to Cohn Street.



# Scope of work:

---

- Replacing/repairing damaged underground water, sewer and/or drainage lines;
- Repairing damaged curbs and gutters;
- Patching the roadway with asphalt;
- Replacing damaged sidewalks and driveway aprons; and
- Installing Americans with Disabilities Act (ADA) - compliant curb ramps at intersections.





# Waterline Replacements or Repairs

---

- **Minimal water service disruptions**
- **Notifications will be sent to residents 48-hours prior to any work that may cause water services disruptions**



# Sidewalks

---

- Sidewalk panels adjacent to Americans with Disabilities Act (ADA)-compliant ramps will be replaced with new sidewalks.
- New sidewalks and ramps will meet ADA-compliance regulations.



*Americans with Disabilities Act (ADA)-compliant curb ramps at sidewalk corners ensure accessibility for people who are visually or physically impaired, using wheelchairs or strollers.*

# Project Timeline

---

<u>Milestone</u>	<u>Date</u>
Construction Start	April 2020
Construction Complete	Spring 2021

\* Please note that all schedules are subject to change and weather delays.

# What to Expect During Construction

---

## Temporary construction impacts

- Additional construction equipment
- Limited parking availability
- Sounds
- Dust

## Efforts to minimize construction impacts

- ✓ Construction signage placed around the sites.
- ✓ Any temporary closures will be communicated in advance.
- ✓ Construction equipment will not be staged in areas that prohibit residential access and parking.
- ✓ Any changes to garbage and US Postal services will be communicated in advance.
- ✓ Residents will be informed throughout construction.

Regular work hours are Monday – Friday 7 a.m. to 5:30 p.m.  
Permission for occasional weekend work may be granted, if required.



# Keeping You Informed Roadwork.nola.gov

The screenshot shows the Roadwork.nola.gov website interface. At the top, there's a navigation bar with the City of New Orleans logo and the site name. Below this is a search bar with the placeholder text "e.g. 200 N Claiborne Ave, New Orleans LA". To the left of the map is a "Show Layer" panel with three options: "Pavement Condition", "Planned Road Construction" (which is selected and highlighted in green), and "Roads Under Construction Now". Below this is a "Legend" panel with a list of project types: "Planned Road Construction", "Full Reconstruction", "Pavement Mill/Overlay", "Pavement Concrete", "Incidental Road Repairs", "Non-Paving Incidentals", "Streetscape", "Bridge Replacement", and "Future Road Work Pending". The main map area shows a street network with various colored overlays representing different types of roadwork. To the right of the map, there's a large white box with the text "CHECK OUT THE NEW FEATURES!" and a list of features: "mobile-friendly", "clean design", "improved functionality", and "enhanced content". Below this is the website URL "roadwork.nola.gov". At the bottom of the screenshot, there's a detailed view of a specific project: "6800 block of Vicksburg St" from "Chapelle St to Mouton St in Lakeview, CA". This view includes a "Pavement Condition" section with a "Failure" link, a "Work Status" section with project details (Project ID: RR3, Location: Lakeview North Group F (FRCI), Schedule: Start: Jul-Sep 2021, End: Jul-Sep 2022), and a "Street Repair Work" section with project details (Project ID: RRc88, Repair Type: Full Reconstruction, Status: Planned). There's also a "Water, Sewer, and/or Drainage Work" section with project details (Work Type: Drainage Line, Sewer Line, and Water Line Replacement, Status: Planned). A "PLEASE NOTE" section at the bottom states: "The content provided on roadwork.nola.gov is subject to change pending unforeseen site conditions, weather delays, constructability issues, etc."

Enter your address here

Tell us what you think of the site or download the data

Choose to view pavement condition, planned work or roads under construction now

Get block-by-block information about the work schedule, type of repairs and what to expect during construction

**ROADWORK** CITY OF NEW ORLEANS  
ROADWORK.NOLA.GOV

**CHECK OUT THE NEW FEATURES!**

- ✓ mobile-friendly
- ✓ clean design
- ✓ improved functionality
- ✓ enhanced content

**roadwork.nola.gov**

**6800 block of Vicksburg St**  
From Chapelle St to Mouton St in Lakeview, CA

**Pavement Condition**  
[Failure](#)

**Work Status**

**Project**  
RR3 - Lakeview North Group F (FRCI)

**Schedule**  
Start: Jul-Sep 2021  
End: Jul-Sep 2022

**Street Repair Work**

Project ID	Repair Type	Status
RRc88	Full Reconstruction	Planned

**Water, Sewer, and/or Drainage Work**


Work Type	Drainage Line, Sewer Line, and Water Line Replacement
Status	Planned

PLEASE NOTE: The content provided on roadwork.nola.gov is subject to change pending unforeseen site conditions, weather delays, constructability issues, etc.



# Stay Connected With Us

---

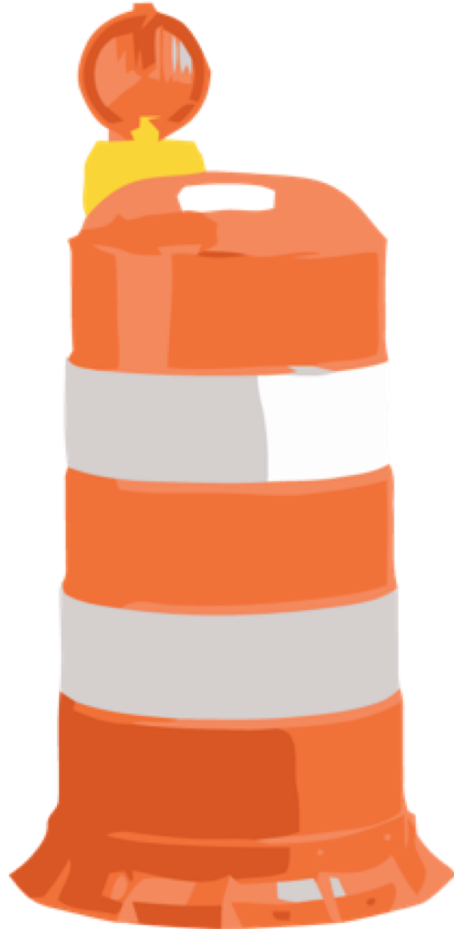

**Construction Hotline: 504.658.ROAD (7623)**



**Facebook.com/roadworkNOLA**



**@roadworkNOLA**



**We have also joined Next Door!**



**@RoadworkNOLA**



**Monthly Newsletter**



City of New Orleans



# Contact Us

**Dawne Massey**  
**Outreach Specialist**  
**[roadwork@nola.gov](mailto:roadwork@nola.gov)**  
**504-658-7623**



## Phone

504.658.ROAD (7623)



## Email

[roadwork@nola.gov](mailto:roadwork@nola.gov)



## Website

[roadwork.nola.gov](http://roadwork.nola.gov)



## Social Media

[@roadworkNOLA](https://twitter.com/roadworkNOLA)



City of New Orleans

